




Guangdong Tongyi Heat Pump Science and Technoloy Co., Ltd

Head office: 20/F, South Tower, No.159 Middle Qiaozhong Road, Liwan District, Guangzhou Factory office: No.2, Chuangye South Road, Songxia Indus-park, Nanhai, Foshan Tel.: 020-81419999 Website: www.tongyiheatpump.com

E-mail: info@tongyiheatpump.com

The contents are for reference only, may contain errors, and subject to change without prior notice. Please refer to the name plates and the manuals of the products for updated information. TY202305

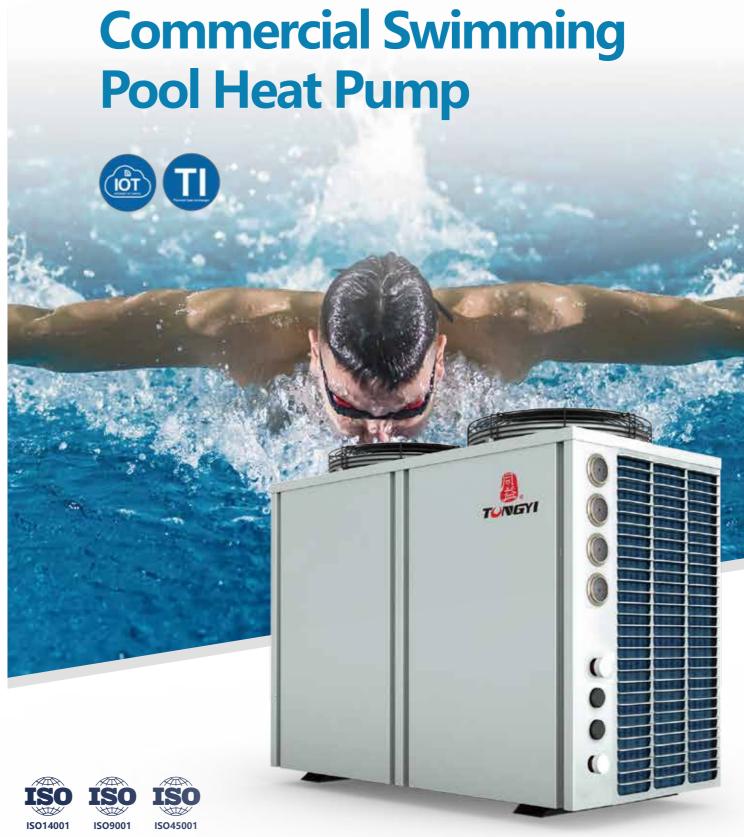



WE KNOW MORE ABOUT OUR CUSTOMERS' NEEDS



LEADING THE INDUSTRY FOR

MORE THAN 20 YEARS



MORE THAN 100 LEADING TECHNOLOGIES **1000000**

ROOTED IN THE INDUSTRY FOR MORE THAN 20 YEARS, SERVING MORE THAN 1 MILLION FAMILIES

FOR MORE THAN 20 YEARS, WE HAVE BEEN SPECIALIZED IN DEVELOPING HEAT PUMP TECHNOLOGY TO PROVIDE MORE SUITABLE SOLUTIONS TO USERS' NEEDS



Established in 1999, Guangdong Tongyi Heat Pump Science and Technology Corp. is one of the first and most professional heat pump manufacturers in China. Tongyi is committed to being a reliable partner, establishing the highest quality standards to ensure product and safety. Tongyi products are always at the forefront of energy efficiency.

For over 20 years of development, Tongyi has gained a high reputation in quality and reliability. Tongyi has one of the most stringent control mechanisms in place for its manufacturing processes and product quality. It has successfully obtained most of the world well known certificates, including CE, EMC, RoHS, LVD, EMD, RED, ERP, IEC, ETL, SASO, CCC, ETC for its products and ISO9001, ISO14001, ISO45001 approvals for the production management.

We value your feedback. We continuously strive to meet the highest standards to satisfy our client's demands. Through rigorous monitoring and relentless after-sales service, customer feedback is collected and swiftly incorporated into our products. Tongyi is always looking to simplify processes putting customers in the center to improve our units and after-sales service.

Guangdong Tongyi Heat Pump Science and Technoloy Co., Ltd

Brief Introduction

Company History

1999

Established and launched products in this year.

2000

Successfully developed high efficiency heat pump air conditioner.

2001 ISO 9001 certified for the first time.

2002

Products are CE CB certified and exported to Europe.

2003

Honored the title of Trusted Quality Products Enterprise.

2004

Promote air source heat pump water heater in domestic market.

2005

Denominated the name of "Air Source Heat Pump Water Heater" in Chinese "Kong Qi Neng" Water Heater in China, and recognized by the industry.

2006

Start to provide heat pump training course twice per year for the industry.

2007

Joined in the National Standard of Heat Pump Water Heater Drafting Committee

2008

Recognized as high-tech enterprises by the government.

2009

Inverter Heat Pump for Radiant heating and cooling supplied in Japan market.

2010

03

Obtained deflector-type heat dissipation device patent and triple-function heat pump patent.

2011

Successfully developed wrap-around aluminum microchannel heat exchanger and introduced the technology to production.

2012

Qualified for the rebate program of Energy-saving Products launched by the government.

2013

Launched clean production plan.

2014

Awarded Excellent quality brand enterprise.

2015

New series of DC inverter heat pump made great success in both domestic and overseas market.

2016

Participated in Beijing coal-to-electricity project, replace coal boiler with TONGYI heat pump for surburb house heating.

2017

Established Tongyi Air Source Heat Pump Research Institute.

2018

Launched new DC EVI heat pump for domestic house heating and cooling in MCE Milan.

2019

Served the hot water project of Daxing international airport (Asian top airport)

2020

Launched new DC EVI heat pump for commercial heating and cooling.

2021

Moved to new headquarters in Guangzhou.



Conservation Product

全国家用电器标准化技术委员会

1 8

ISO45001:2007 Occupational Health and Safety Management

pressore personants interprete

F Inury F Drany

Ð.

ETL

EALL.

6-0-1-0



Drafting enterprise for National Standard of Heat Pump Water Heate

> ISO45001:2007 Occupational Health and Safety Management System Certification Certificate

 ISO9001:2008 Certificate of Quality Management System



6 -00



ISO14000:2004 Environmental Management System Certification Certificate



ISO9001:2008 Certificate of Quality Management System




CE



CE


- ISO14000:2004 Environmental Management System Certification Certificate
- Enterprise supported by The National Innovation Fund

Working Theory

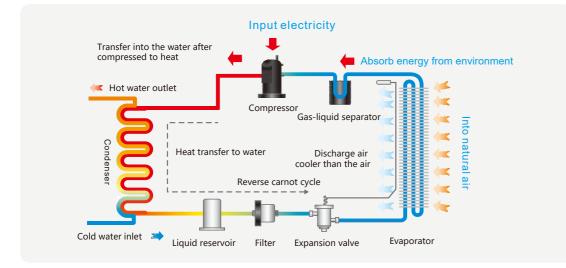

ENERGY EFFICIENT APPLICATION

TONGYI Heat Pump offers the best solution for home heating and hot water supply with TY's inverter technology. It is 4 times more energy efficient than boiler system by absorbing energy from the outdoor environment.

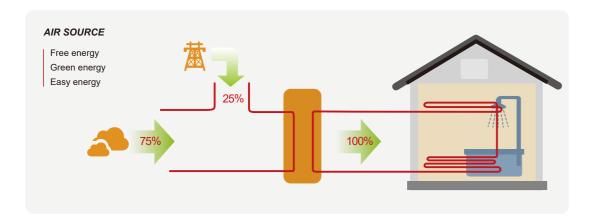

VARIOUS APPLICATION









ASHP VS other heating methods

Heating Methods		Tongyi A	ASHP Oil/Gas ho		ot water boiler	Electrical water heater		
Type of energy consumption		Electricity		Oil/Gas		Electricity		
Safety Risk		Low		High			Middle	
Environmental impa	ct	Non-pollu	ıtion	Heavi	ly polluted		Non-pollution	
Estimated product life	time	10-12 Years		5-8 Years		5-8 years		
Installation site		NO linits		Special room		Special room		
floor space		Small		Large		Middle		
Safety performance	e	Safe and reliable		Flammable, explosive goods		Heating pipe aging, leakage		
Noise Level		Low		High		Low		
Failure Detection Way		Automa			2-3 technician		1 electrician	
Labor costs Without s		Without specif	ic person 2-3 peo		ople labor		1 people labor	
Other cost		No	Annual examir		e and approve cost A		nnual exmine cost	
Under same condition, Dai		ily hot water demand 1000L, Heating water from 15°C to 55°C, comparison for running cost					n for running cost	
		The specific heat of water (Kcal/Kg.°C)					1	
heat value(Kcal)=specific heat of water (kcal/($(^{\circ}C)) \times daily water requirement(kg) xwater temp difference(^{\circ}C)$				40000	
Heating Methods	Tongyi heat pump		Electrical water heater		liquid gas water heater		Oil water heater	
Fuel	E	lectricity Ele		ectricity	Liquid gas		Gas	
Combustion value		860	860		8667		8700	
Unit		Kcal/h	ł	Kcal/h	Kcal/(m3.h)		Kcal/(Kg.h)	
Efficiency(%)	380		95		80		75	
Demand for energy	12.2		49		5.8		5.2	
Unit		Degree C		egree	m³		Kg	
Fuel price (\$)		0.15	0.15		1.09		1.20	
Amount fuel cost (\$)) 1.82		7.32		6.28		6.25	
Running cost (\$/Year)	ar) 666.8		2	2667.2	2294.3		2284.9	

HOTELS

SCHOOLS

HOSPITALS

05

Energy Saving Compared

Notes: The price on the form as per market price at the time, the energy consumption of other types of heat source as per national standard of energy efficiency, specific data might be a gap. Please refer to the local condition.

Professional R&D Team



Master of Core Technology

TONGYI is one of the first and most professional heat pump manufacturers in China. We are in cooperation with 3 top universities in China on various HVAC research topics.

Parts & Components Inspection

We monitor our entire supply chain for all the main parts and accessories strictly. 100% of the parts and components undergo rigorous incoming inspection at our factory.



Professional Design Procedure

From the beginning of product development, a wide range of details are taken into account: easy installation, user friendliness, cutting-edge design, high functionality, full-scale tests, and the use of more than 56 different technologies. Always aiming to provide our customers with highest standard products.

Process Control

In our production line we strictly control all processes. From the first step until the units are packed and ready to ship. Through relentless monitoring, we record all processes and developments to ensure the products are reliable and in conformity with product-specifications.



Professional R&D Team

Cooperating with several top universities in China, Tongyi attracts young talents every year and has established a government-recognized R&D Center with a team of highly-qualified engineers.

Finished-Product Inspection

We implement 100% inspection on the finished products before shipping. We implement an additional double sample inspection for all units shipped to the overseas market.

Quality Control









Product Features

Titanium heat exchanger

Titanium has the super strong corrosion resistant ability. Our titanium heat exchanger use seamless pure titanium tube as heat conductor, can ensure the titanium heat exchanger be used for a long time, without any cost in the after-sale services.



EEV, precise flow control

Wide working temperature range, faster and more accurate refrigerant flow control than capillary and mechanical expansion valve. Best choice to achieve higher efficiency and energy-saving.

Heating & Cooling

By utilizing 4 ways valve, TONGYI Heat Pump provide both heating and cooling mode to create more possibility for pool enjoyment.




Remote control

BMS contact point / modbus support(with RS485) to Amazon cloud, realize remote control function optional.

Auto-defrosting program and anit-freeze

Intelligent defrosting technology, which can determine the time of defrosting according to the operating conditions of the unit (running time, exhaust temperature), ambient temperature and thickness of frost, so as to achieve intelligent defrosting when it is necessary, which greatly shortens the defrosting time by more than 20% and ensures the high heating capacity.

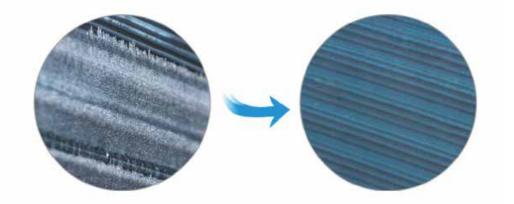

Product Features



10

Intelligent Controller Display



- Human intelligent control
- Long distant control Multiple timing functions
- Internet control support
- Automatic power-off memory function
- Automatic diagnose, error code for trouble
- Available to inquiry any parameter
- Convenient maintenance

High-performance FM

It use outer rotor axial flow silent fan with five-leaf balanced aluminum alloy wind wheel. It has the advantages of corrosion resistance, large air volume and low noise.

Patent louvered casing(optional)

TONGYI' s patent louvered casing can better for waterproof, windproof and dust-proof. Patent no.:CN201030670236.9.

Multi-protections

The system runs safely, steadily and reliably thanks to our full protection: high temperature protection, compressor overload & overheat protection, power phase sequence & over/under voltage protection,etc.



Unique hydrophilic fin coil heat exchanger

Large amount for air inlet, Air exchangers (fin-coil) with hydrophilic coating are strongly anti-corrosive and perform at high efficiency.

Dry-heat protection

Over current protection

Water flow protection

Automatic detection fault

System high/low Temp sensor pressure protection fault protection

monitoring



Product Features





8		
		12
		P
8.	The summer of the second se	
		b
		- 5
	THE REAL PROPERTY AND ADDRESS OF THE REAL PROPERTY ADDRESS	
8		Ľ
		2
)
AL.	- ALCALLET LA CALLER AND A	



Technical Data m3 80 160 400 Advised Pool Volume m3 80 160 400 Performance condition: Air 27'C/Water 26'C/Humidity 80% 43 100 Rated Capacity kW 21 43 100 Rated Input Power kW 4 8.1 19.2 Rated COP / 5.2 5.3 5.2 Heating capacity: Air 24'C/Water 26'C/Humidity 62% 40 93 Rated CoP / 5 5.1 5 Heating capacity: Air 24'C/Water 26'C KW 4 8 84 Rated COP / 5 5.1 5 Heating capacity: Air 20'C/Water 26'C KW 18.5 36 84 Rated COP / 4.6 4.5 4.6 Performance condition: Air 15'C/Water 26'C/Humidity 70% 8 8.3 19 Rated CoP / 4.1 4 4.2 Performance Condition: Air 10'C/Water 26'C/Humidity 50. 36 3.7 R	Model		KX210S YIE/A	KX430S YIE/A	KX750S YIE/A		
Performance condition: Air 27°C/Water 26°C/Humidity 80% Rated Capacity kW 21 43 100 Rated Capacity kW 4 8.1 19.2 Rated COP / 5.2 5.3 5.2 Heating capacity: Air 24°C/Water 26°C/Humidity 62% U 93 Rated Capacity kir W 20.2 40 93 Rated Capacity kW 40 7.8 18.6 Rated CoP / 5 5.1 5 Heating capacity: Air 20°C/Water 26°C U 5 5.1 5 Rated CoP / 5 36 84 Rated CoP / 4.6 4.5 4.6 Performance condition: Air 15°C/Water 26°C/Humidity 70% E E Rated Capacity kW 16 33 80 Rated CoP / 4.1 4 4.2 Performance condition: Air 15°C/Water 26°C/Humidity 64% 3.6 7.2 17.8 Rated CoP / 4.1 4 <th colspan="6"></th>							
Rated Capacity kW 21 43 100 Rated Input Power kW 4 8.1 19.2 Rated COP / 5.2 5.3 5.2 Heating capacity: Air 24°C/Water 26°C/Humidity 62% 8 93 5.2 Rated Capacity kW 20.2 40 93 Rated Input Power kW 4 7.8 18.6 Rated COP / 5 5.1 5 Heating capacity: Air 20°C/Water 26°C 7 5 5.1 5 Heating capacity: Air 20°C/Water 26°C 7 4.6 4.5 4.6 Rated Capacity kW 18.5 36 84 Rated COP / 4.6 4.5 4.6 Performance condition: Air 15°C/Water 26°C/Humidity 70% 8.3 19 19 Rated COP / 4.6 4.5 4.6 Performance condition: Air 15°C/Water 26°C/Humidity 70% 8.3 19 19 Rated COP / 4.1 4 <t< td=""><td>Advised Pool Volume</td><td>m3</td><td>80</td><td>160</td><td>400</td></t<>	Advised Pool Volume	m3	80	160	400		
Rated Input Power KW 4 8.1 19.2 Rated COP / 5.2 5.3 5.2 Heating capacity: Air 24°C/Water 26°C/Humidity 62% KW 20.2 40 93 Rated Capacity kW 20.2 40 93 Rated Input Power kW 4 7.8 18.6 Rated COP / 5 5.1 5 Heating capacity: Air 20°C/Water 26°C / 5 5.1 5 Heating capacity: Air 20°C/Water 26°C / 4.6 4.5 4.6 Rated Capacity kW 18.5 36 84 Rated CoP / 4.6 4.5 4.6 Performance condition: Air 15°C/Water 26°C/Humidity 70% 7 7.8 7 Rated Capacity kW 16 33 80 Rated CoP / 4.1 4 4.2 Performance Condition: Air 10°C/Water 26°C/Humidity 64% 7.2 17.8 7.2 Rated Capacity kW 13.5	Performance condition: Air 27°C/Water 26°C/Humidity 80%						
Anted COP / 5.2 5.3 5.2 Heating capacity: Air 24°C/Water 26°C/Humidity 62% 40 93 Rated Capacity kW 20.2 40 93 Rated Input Power kW 4 7.8 18.6 Rated COP / 5 5.1 5 Heating capacity: Air 20°C/Water 26°C / 5 5.1 5 Heating capacity: Air 20°C/Water 26°C / 4.6 8 18.2 Rated COP / 4.6 4.5 4.6 Performance condition: Air 15°C/Water 26°C/Humidity 70% 4.6 4.5 4.6 Performance condition: Air 15°C/Water 26°C/Humidity 70% 8.3 19 Rated CoP / 4.1 4 4.2 Performance condition: Air 10°C/Water 26°C/Humidity 61% 3.3 80 Rated CoP / 4.1 4 4.2 Performance Condition: Air 10°C/Water 26°C/Humidity 61% 3.3 6.6 6.6 Rated Input Power kW 13.5 3.6 3.7 <	Rated Capacity	kW	21	43	100		
Heating capacity: Air 24°C/Water 26°C/Humidity 62% Image: Component of the image: Comp	Rated Input Power	kW	4	8.1	19.2		
Rated Capacity kW 20.2 40 93 Rated Input Power kW 4 7.8 18.6 Rated COP / 5 5.1 5 Heating capacity: Air 20°C/Water 26°C KW 18.5 36 84 Rated Capacity kW 18.5 36 84 Rated Input Power kW 4 8 18.2 Rated CoP / 4.6 4.5 4.6 Performance condition: Air 15°C/Water 26°C/Humidity 70% 8.3 19 Rated Capacity kW 16 33 80 Rated Capacity kW 3.9 8.3 19 Rated CoP / 4.1 4 4.2 Performance Condition: Air 10°C/Water 26°C/Humidty 54% 3.6 3.7 Rated Capacity kW 13.5 2.6 66 Rated Capacity kW 3.85 7.2 17.8 Rated Capacity kW 13.5 3.6 3.7 Performance Condit	Rated COP	/	5.2	5.3	5.2		
Rated Input Power kW 4 7.8 18.6 Rated COP / 5 5.1 5 Heating capacity: Air 20°C/Water 26°C / 5 36 84 Rated Capacity: Air 20°C/Water 26°C kW 4.8 18.2 Rated Input Power kW 4 8 18.2 Rated COP / 4.6 4.5 4.6 Performance condition: Air 15°C/Water 26°C/Humidity 70% 8.3 19 Rated Input Power kW 3.9 8.3 19 Rated CoP / 4.1 4 4.2 Performance Condition: Air 10°C/Water 26°C/Humidity 64% 3.3 80 Rated Capacity kW 13.5 26 66 Rated Cope / 3.5 3.6 3.7 Performance Condition: Air 10°C/Water 26°C/Humidity 5.3 10.6 28.3 Rated Copacity kW 3.5 3.6 3.7 Performance Condition (Air 35°C/Water 30°C/Humid. 59.2%) 3.1 3 3 <t< td=""><td colspan="6"></td></t<>							
Rated COP / 5 5.1 5 Heating capacity: Air 20°C/Water 26°C KW 18.5 36 84 Rated Capacity KW 18.5 36 84 Rated Input Power KW 4.6 4.5 4.6 Performance condition: Air 15°C/Water 26°C/Humidity 70% KW 16 33 80 Rated Capacity kW 16 33 80 80 Rated Capacity kW 16 33 80 Rated Capacity kW 3.9 8.3 19 Rated CoP / 4.1 4 4.2 Performance Condition: Air 10°C/Water 26°C/Humidity 64% 8 3.5 7.2 17.8 Rated Capacity kW 13.5 26 66 66 Rated Capacity kW 13.5 3.6 3.7 Performance Condition (Air 35°C/Water 30°C/Humid. 59.2%) 3.6 3.7 Rated Capacity kW 17 33 85 Rated Capacity <th< td=""><td>Rated Capacity</td><td>kW</td><td>20.2</td><td>40</td><td>93</td></th<>	Rated Capacity	kW	20.2	40	93		
Heating capacity: Air 20°C/Water 26°C Rated Capacity kW 18.5 36 84 Rated Input Power kW 4 8 18.2 Rated COP / 4.6 4.5 4.6 Performance condition: Air 15°C/Water 26°C/Humidity 70% 7 7 7 Rated Capacity kW 16 33 80 Rated Input Power kW 3.9 8.3 19 Rated COP / 4.1 4 4.2 Performance Condition: Air 10°C/Water 26°C/Humidity 64% 7.2 17.8 Rated Capacity kW 13.5 26 66 Rated Input Power kW 3.85 7.2 17.8 Rated Capacity kW 13.5 3.6 3.7 Performance Condition (Air 35°C/Water 30°C/Humid: 59.2%) 5.3 10.6 28.3 Rated Capacity kW 17 33 85 Rated Capacity kW 5.3 10.6 28.3 Rated EER / <td< td=""><td>Rated Input Power</td><td>kW</td><td>4</td><td>7.8</td><td>18.6</td></td<>	Rated Input Power	kW	4	7.8	18.6		
Rated Capacity kW 18.5 36 84 Rated Input Power kW 4 8 18.2 Rated COP / 4.6 4.5 4.6 Performance condition: Air 15°C/Water 26°C/Humidity 70% 8 80 80 Rated Capacity kW 16 33 80 Rated Capacity kW 3.9 8.3 19 Rated COP / 4.1 4 4.2 Performance Condition: Air 10°C/Water 26°C/Humidty 64% 4.2 4.2 Rated Capacity kW 13.5 26 66 Rated Capacity kW 13.5 26 66 Rated CoP / 3.5 3.6 3.7 Performance Condition (Air 35°C/Water 30°C/Humidt. 59.2%) 3.6 3.7 Rated Capacity kW 17 33 85 Rated Capacity kW 17 33 85 Rated EER / 3.2 3.1 3 Performance Condition (Air 43°C/Wate	Rated COP	/	5	5.1	5		
Rated Input Power kW 4 8 18.2 Rated COP / 4.6 4.5 4.6 Performance condition: Air 15°C/Water 26°C/Humidity 70% KW 16 33 80 Rated Capacity kW 16 33 80 Rated Input Power kW 3.9 8.3 19 Rated COP / 4.1 4 4.2 Performance Condition: Air 10°C/Water 26°C/Humidity 64% 72 17.8 Rated Capacity kW 13.5 26 66 Rated Capacity kW 3.85 7.2 17.8 Rated COP / 3.5 3.6 3.7 Performance Condition (Air 35°C/Water 30°C/Humid. 59.2%) 72 17.8 Rated Capacity kW 17 33 85 Rated	Heating capacity: Air 20°C/Water 26°C			•			
Rated COP / 4.6 4.5 4.6 Performance condition: Air 15°C/Water 26°C/Humidity 70% Rated Capacity kW 16 33 80 Rated Input Power kW 3.9 8.3 19 Rated COP / 4.1 4 4.2 Performance Condition: Air 10°C/Water 26°C/Humidity 64% Rated Capacity kW 13.5 26 66 Rated Capacity kW 13.5 26 66 66 Rated Cope / 3.85 7.2 17.8 Rated Copacity kW 3.85 3.6 3.7 Performance Condition (Air 35°C/Water 30°C/Humid. 59.2%) 83 10.6 28.3 Rated Capacity kW 17 33 85 Rated Capacity kW 5.3 10.6 28.3 Rated EER / 3.2 3.1 3 Performance Condition (Air 43°C/Water 35°C/Humid. 70%) 35 90 33.3 90 Rated Capacity kW 18.3 35 90 Rated Capacity kW 6.7 13.5 <	Rated Capacity	kW	18.5	36	84		
Rated COP / 4.6 4.5 4.6 Performance condition: Air 15°C/Water 26°C/Humidity 70% Rated Capacity kW 16 33 80 Rated Input Power kW 3.9 8.3 19 Rated COP / 4.1 4 4.2 Performance Condition: Air 10°C/Water 26°C/Humidity 64% Rated Capacity kW 13.5 26 66 Rated Capacity kW 13.5 26 66 66 Rated Cope / 3.85 7.2 17.8 Rated Copacity kW 3.85 3.6 3.7 Performance Condition (Air 35°C/Water 30°C/Humid. 59.2%) 83 10.6 28.3 Rated Capacity kW 17 33 85 Rated Capacity kW 5.3 10.6 28.3 Rated EER / 3.2 3.1 3 Performance Condition (Air 43°C/Water 35°C/Humid. 70%) 83 35 90 Rated Capacity kW 18.3 35 90 Rated Capacity kW 6.7 13.5 33.3 <td>Rated Input Power</td> <td>kW</td> <td>4</td> <td>8</td> <td>18.2</td>	Rated Input Power	kW	4	8	18.2		
Rated Capacity kW 16 33 80 Rated Input Power kW 3.9 8.3 19 Rated COP / 4.1 4 4.2 Performance Condition: Air 10°C/Water 26°C/Humidity 64% 13.5 26 66 Rated Capacity kW 13.5 26 66 Rated Input Power kW 3.85 7.2 17.8 Rated COP / 3.5 3.6 3.7 Performance Condition (Air 35°C/Water 30°C/Humid. 59.2%) 3.6 3.7 Performance Condition (Air 35°C/Water 30°C/Humid. 59.2%) 3.6 3.7 Rated Capacity kW 17 33 85 Rated Input Power kW 5.3 10.6 28.3 Rated EER / 3.2 3.1 3 Performance Condition (Air 43°C/Water 35°C/Humid. 70%) 3.5 90 Rated Capacity kW 18.3 35 90 Rated Capacity kW 6.7 13.5 33.3 Rated EER	Rated COP	/	4.6	4.5	4.6		
Rated Input Power kW 3.9 8.3 19 Rated COP / 4.1 4 4.2 Performance Condition: Air 10°C/Water 26°C/Humidity 64% 13.5 26 66 Rated Capacity kW 13.5 26 66 Rated Input Power kW 3.85 7.2 17.8 Rated COP / 3.5 3.6 3.7 Performance Condition (Air 35°C/Water 30°C/Humid. 59.2%) X Y Y Y Rated Capacity kW 17 33 85 36 3.7 Performance Condition (Air 35°C/Water 30°C/Humid. 59.2%) X Y <thy< th=""> <thy< th=""> <thy< th=""> <</thy<></thy<></thy<>	Performance condition: Air 15°C/Water	26°C/Humidi	ty 70%				
Rated COP / 4.1 4 4.2 Performance Condition: Air 10°C/Water 26°C/Humidity 64% Rated Capacity kW 13.5 26 66 Rated Capacity kW 13.5 26 66 Rated Input Power kW 3.85 7.2 17.8 Rated COP / 3.5 3.6 3.7 Performance Condition (Air 35°C/Water 30°C/Humid. 59.2%) X 7.2 17.8 Rated Capacity kW 17 33 85 Rated Capacity kW 17 33 85 Rated Capacity kW 17 33 85 Rated Input Power kW 5.3 10.6 28.3 Rated EER / 3.2 3.1 3 Performance Condition (Air 43°C/Water 35°C/Humid. 70%) X 13.5 90 Rated Input Power kW 18.3 35 90 Rated Input Power kW 6.7 13.5 33.3 Rated EER / 2.7 </td <td>Rated Capacity</td> <td>kW</td> <td>16</td> <td>33</td> <td>80</td>	Rated Capacity	kW	16	33	80		
Performance Condition: Air 10°C/Water 26°C/Humidity 64% Rated Capacity kW 13.5 26 66 Rated Input Power kW 3.85 7.2 17.8 Rated COP / 3.5 3.6 3.7 Performance Condition (Air 35°C/Water 30°C/Humid. 59.2%) 3.6 3.7 Rated Capacity kW 17 33 85 Rated Capacity kW 5.3 10.6 28.3 Rated EER / 3.2 3.1 3 Performance Condition (Air 43°C/Water 35°C/Humid. 70%) 8 90 3 Rated Capacity kW 18.3 35 90 Rated Capacity kW 6.7 13.5 33.3 Rated Input Power kW 6.7 13.5 33.3 Rated Input Power kW 6.7 13.5 33.3 Rated EER / 2.7 2.6 2.7	Rated Input Power	kW	3.9	8.3	19		
Rated Capacity kW 13.5 26 66 Rated Input Power kW 3.85 7.2 17.8 Rated COP / 3.5 3.6 3.7 Performance Condition (Air 35°C/Water 30°C/Humid. 59.2%) 8 8 85 Rated Capacity kW 17 33 85 Rated Capacity kW 5.3 10.6 28.3 Rated Input Power kW 5.3 10.6 28.3 Rated EER / 3.2 3.1 3 Performance Condition (Air 43°C/Water 35°C/Humid. 70%) 90 3.3 90 Rated Capacity kW 18.3 35 90 Rated Input Power kW 6.7 13.5 33.3 Rated Input Power kW 6.7 13.5 33.3 Rated EER / 2.7 2.6 2.7	Rated COP	/	4.1	4	4.2		
Rated Input Power kW 3.85 7.2 17.8 Rated COP / 3.5 3.6 3.7 Performance Condition (Air 35°C/Water 30°C/Humid. 59.2%) Rated Capacity kW 17 33 85 Rated Capacity kW 17 33 85 3.6 3.7 Rated Capacity kW 17 33 85 36 37 Rated Input Power kW 5.3 10.6 28.3 3 <td colspan="7"></td>							
Rated COP / 3.5 3.6 3.7 Performance Condition (Air 35°C/Water 30°C/Humid. 59.2%) X <	Rated Capacity	kW	13.5	26	66		
Performance Condition (Air 35°C/Water 30°C/Humid. 59.2%) Rated Capacity kW 17 33 85 Rated Input Power kW 5.3 10.6 28.3 Rated EER / 3.2 3.1 3 Performance Condition (Air 43°C/Water 35°C/Humid. 70%) X 18.3 35 90 Rated Input Power kW 6.7 13.5 33.3 Rated Input Power kW 6.7 13.5 33.3 Rated EER / 2.7 2.6 2.7	Rated Input Power	kW	3.85	7.2	17.8		
Rated Capacity kW 17 33 85 Rated Input Power kW 5.3 10.6 28.3 Rated EER / 3.2 3.1 3 Performance Condition (Air 43°C/Water 35°C/Humid. 70%) XW 18.3 35 90 Rated Input Power kW 6.7 13.5 33.3 Rated EER / 2.7 2.6 2.7	Rated COP	/	3.5	3.6	3.7		
Rated Input Power kW 5.3 10.6 28.3 Rated EER / 3.2 3.1 3 Performance Condition (Air 43°C/Water 35°C/Humid. 70%) KW 18.3 35 90 Rated Input Power kW 6.7 13.5 33.3 Rated EER / 2.7 2.6 2.7	Performance Condition (Air 35°C/Wate	r 30℃/Humid	l. 59.2%)				
Rated EER / 3.2 3.1 3 Performance Condition (Air 43°C/Water 35°C/Humid. 70%) V V 18.3 35 90 Rated Capacity kW 18.3 35 90 3.3 33.3	Rated Capacity	kW	17	33	85		
Performance Condition (Air 43°C/Water 35°C/Humid. 70%) Rated Capacity kW 18.3 35 90 Rated Input Power kW 6.7 13.5 33.3 Rated EER / 2.7 2.6 2.7	Rated Input Power	kW	5.3	10.6	28.3		
Rated Capacity kW 18.3 35 90 Rated Input Power kW 6.7 13.5 33.3 Rated EER / 2.7 2.6 2.7	Rated EER	/	3.2	3.1	3		
Rated Input Power kW 6.7 13.5 33.3 Rated EER / 2.7 2.6 2.7							
Rated EER / 2.7 2.6 2.7	Rated Capacity	kW	18.3	35	90		
	Rated Input Power	kW	6.7	13.5	33.3		
Power Supply	Rated EER	/	2.7	2.6	2.7		
	Power Supply		•				
Dewer Supply, Volte (Db // Jack Strand Stran		50 Hz	380V/3Ph/50Hz	380V/3Ph/50Hz	380V/3Ph/50Hz		
Power Supply, Volts/Ph/Hz 30 Hz 300 Hz 300 Hz 300 Hz 300 Hz 300 Hz 300 Hz 400 Hz	Power Supply, Volts/Pn/Hz	60 Hz	/	/	/		
Max. Input Power kW 7 14 35	Max. Input Power	kW		14	35		
Max. Input Current A 12.5 25 60	Max. Input Current	A	12.5	25	60		
NOISE LEVEL	NOISE LEVEL						
Sound Pressure(1m) dB(A) 58 62 72	Sound Pressure(1m)	dB(A)	58	62	72		
Sound Pressure(10m) dB(A) 38 42 52	Sound Pressure(10m)	dB(A)	38	42	52		

Model		KX210S YIE/A	KX430S YIE/A	KX750S YIE/A
OPERATION RANGE		•	•	
Ambient temperature	°C	-7~43	-7~43	-7~43
Water outlet temperature range	°C	15~45	15~45	15~45
Max. Outlet Water Temperature	°C	45	45	45
CONFIGURATIONS		1	1	
THROTTLE				
Throttle Type		EEV	EEV	EEV
COMPRESSOR		1		
Туре	/	Scroll	Scroll	Scroll
Brand	/	copeland	copeland	copeland
Quantity	/	1	2	2
FAN	,			_
Туре	/	Axial	Axial	Axial
Air Volume	, m3/hr	7,500	7,500	15,000
EVAPORATOR COILS	1113/111	1,500	1,500	13,000
Fin Type		Hvc	drophilic Aluminum Fins	
Fin Tube Type		Internal Threaded	Internal Threaded	Internal Threaded
CONDENSER		internal intedaca	Internal Intedacta	internal micadea
Туре		Titanium	Titanium	Titanium
Water Flow Rate	m3/hr	9	18	43
Pressure Drop thru Heat Exchanger	kPa	50	60	80
Max. Working Pressure – Water Side	kPa	700	700	700
REFIGERANT	KFd	700	700	700
-	1	R410A	R410A	R410A
Type GWP	/	-	-	-
	/	2,090	2,090	2,090
Charge	kg	3	-	
CO2 Equivalent	TON	-	13	29
Refrigerant System Pressure Max.	kPa	4,200	4,200	4,200
Refrigerant System Pressure Min.	kPa	50	50	50
Control				
Controller		LCD	LCD	LCD
HYDRONIC				
Rated Water Flow Rate	m3/hr	9	18	43
Water Pressure Drop	kPa	50	60	80
Water Pressure Drop Max	kPa	60	70	90
Piping Connections		1	1	I
Water Connection		External thread	External thread	flange
Piping Connections Inlet		DN40	DN50	DN75
Piping Connections Outlet		DN40	DN50	DN75
PACKING			1	1
Dimensions (Lx Wx H)	mm	840 x 840 x 938	1503 x 723 x 1208	2200 x 1005 x 1890
Packing Dimensions (Lx Wx H)	mm	930 x960x 1140	1615 x 840 x 1355	2330 x 1150 x 2065
Net Wt.	kg	124	260	650
Approx. Shipping Wt.	kg	145	300	700
PROTECTION				
Cabinet	/	Po	wder Painted Galvanized	d Steel
IP Rating (Enclosure Class)	/	IPX4	IPX4	IPX4
Defrosting	/	4-Way Valve	4-Way Valve	4-Way Valve

Product Specification

DAXING INTERNATIONAL AIRPORT

Category: Hot water-Transportation
Model: TONGYI EVI Commercial Air source HP
Description: supply of hot water for aircraft maintenance. Also supply hot water for China southern airline VIP bathroom. Providing hot water in low ambient temperature.

Project Portfolios



BEIJING OLIMPYC STADIUM



Category: Hot water-stadium
Selected model:TONGYI EVI Commercial air source heat pump
Description:TONGYI Commercial heat pump water heater,
supply hot water for restroom in bird nest stadium.

Project Portfolios

SAIC MOTOR FACTORY



21

Project Portfolios









Hilton



Le Meridien



Four Season



Double Tree



Mercure



Novotel



Holiday Inn



Langham



Marriott



NARADA



Conrad







SOFITEL

Guizhou Astronomical Telescope Project

ZOOMLION



Unilever



Alibaba



Shenzhen Universiade



Hangzhou Asia Games



Bulgari



St Regis

Project Portfolios



Taj Mahal hotel



Westin



Pullman



Project Portfolios

28

To help achieve the carbon neutrality with the heat pump technology

From 1999 up to now, the contribution of Tongyi HeatPump to the energy conservation and CO2 emissionreduction, is equal to growing**100 million** trees for thesociety!

750,000tons

Saved coal consumption nore than 750,000tons

3.2 million kilograms

Reduced nitrideemissions more than 3.2 million kilograms!

3 billion kilograms

Reduced carbon dioxide emissions more than 3 billion kilograms!

12.5 million kilograms

Reduced sulfur dioxide emissions more than 12.5 million kilograms!

MEMO	MEMO

